



## BOOSTER FAN UG-2

Extra booster fan with operating voltage 24VAC.  
The fan is provided with an electronic voltage unit changing 24VAC to 12VDC.  
Consumption = 1.0VA (50mA)



## FILTER F-UG 2

Dust filter.  
For installation having bad air quality.



## MOUNTING BRACKET UG-BESLAG

For moutage of the Uniguard smoke detector on to circular or insulated flat ducts.



## VENTURI PIPE VENTRÖR


VENTURI PIPE 0,6M  
VENTURI PIPE 1,5M  
VENTURI PIPE 2,8M

For ducts smaller than 0,6 m use venturi pipe length 0,6 m.  
For ducts between 0,6 and 1,3 m use venturi pipe length 1,5 m.  
For ducts over 1,4 m a use venturi pipe length 2,8 m.



## SIGN "HIDDEN SMOKE DETECTOR"

For smoke detectors in elevator engine rooms or detectors mounted above suspended ceilings.

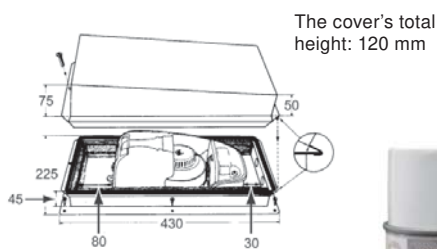

Volume 250 ml




## PROTECTION COVER UG-SH

Is used as covering protection for Uniguard smoke detector mounted outdoors or in cold attics. To avoid that hot outlet air is condensating.

## SMOKE DETECTOR TESTER RDP-300

For testing of smoke detectors.  
The unit is provided with a spray nozzle.  
The spray bottle can be used for many tests.  
The spray will work on ion- and optical smoke detectors.



## LED INDICATION LED-03

For showing location of hidden smoke detector.  
Maximal cable length 3 m.