

TRC-A-3A - Touchscreen apartment controller



The TRC-A-3A room controllers are designed for apartment control and have modern sharp slim line 3.5" colour touchscreen interface. The controllers have heating and/or cooling controls with summer / winter change-over function.

The controllers have also Home / Away / Boost operation button allowing the apartment conditions to be set to required state with a simple press of a button. The controllers can control the apartment supply and extract flow together with the extractor fans allowing the correct pressurised conditions to be achieved in all operating conditions.

The TRC-A-3A controllers have three analogue 0...10 Vdc outputs, two external sensors inputs (resistive or analogue) and one digital input. The devices are available with both Modbus RTU and BACnet MS/TP communication.

As an option there are additional functions and measurements available:

- Relative humidity measurement (-RH)
- CO₂ measurement (-CO₂)
- Analogue inputs instead of resistive inputs (-AI)
- Consumption data view (-CD)

Technical specifications


Property	Value
Supply	24 Vac (50/60 Hz, 22...28 V), < 200 mA / 24 Vdc (22...28 V), < 80 mA
Internal temperature measurement	
Range	0...50 °C (32...122 °F)
Accuracy (25 °C / 77 °F)	±0.5 °C (0.9 °F)
CO ₂ measurement (CO ₂ models)	
Range	0...5000 ppm
Accuracy (25 °C / 77 °F)	±50 ppm + 3 % from reading
Calibration	Automatic
Warm-up time	< 20 seconds
Non-linearity	< 1 % FS
Time constant	2 min

Property	Value
Humidity measurement (RH models)	
Range	0...100 %rH
Accuracy (25 °C / 77 °F)	typ. ±2 %rH (20...80 %rH)
Outputs	3 x 0...10 Vdc, 0.14 mA, input impedance ≥ 73 kΩ
Inputs	
Analogue inputs	2 x external NTC 10 sensor (RI1 & RI2). Resistive inputs can also act as potential free contacts. AI option: 2 x 0..10 Vdc inputs (replaces RI1 & RI2).
Digital inputs	1 x digital input, potential free contact, impedance <1 kΩ
Communication (MOD models)	Modbus RTU
Bus speed	9600*/19200/38400/57600/76800 bit/s
Parity	none*/odd/even
Stop bits	1 or 2
Unit load	1/2 UL
Communication (BAC models)	BACnet MS/TP
Bus speed	9600*/19200/38400/57600/76800 bit/s
Parity	none*/odd/even
Stop bits	1 or 2
Unit load	1/2 UL
Display	3.5" backlit touchscreen, 320 x 480 pixels, 255K colours
Appliance class (IEC 60664-1)	III
Operating conditions	
Temperature	0...50 °C (32...122 °F)
Humidity	0...95 %rH (non-condensing)
Storage conditions	
Temperature	-30...70 °C (-22...158 °F)
Humidity	0...95 %rH (non-condensing)
Wiring terminals (power supply and analogue outputs)	
Wire type	Solid and stranded wire
Wire size	Solid: 0.14...2.5 mm ² , stranded: 0.14...1.50 mm ² / 26...14 AWG (UL)
Rising clamp size	2.4 x 1.6 mm
Wiring terminals (communication and inputs)	Tilted terminals
Wire type	Solid and stranded wire
Wire size	0.14...1.5 mm ² / 26...14 AWG (UL)
Rising clamp size	2.4 x 1.8 mm
Housing	
Protection class	IP20
Materials	Polycarbonate plastics, self extinguishing
Mounting	On a flush mounting box (60 mm hole distance)
Dimensions (w x h x d)	88 x 112 x 43 mm

Property	Value
Weight	220 g
* = factory setting	

Wiring

-  **WARNING:** Device wiring and commissioning can only be carried out by qualified professionals. Always make the device wirings in de-energised electricity network.
-  **WARNING:** This product is appliance class III product according to IEC 60664-1. The product may only be connected to SELV (safety extra low voltage) electricity network.
-  **CAUTION:** The product may only be connected to overvoltage category I or II electricity network according to IEC 60664-1. Use external overvoltage protection if the device is connected to the overvoltage category III electricity network.
-  **CAUTION:** The used cables must have minimum of 230 Vac insulation for SELV wiring, if the mounting box includes also 230 Vac voltage wirings.
-  **CAUTION:** Use single stranded wires or use wire end sleeves if multi stranded wires are used.
-  **CAUTION:** Don't connect fan motors in parallel. One product can control only one fan motor.

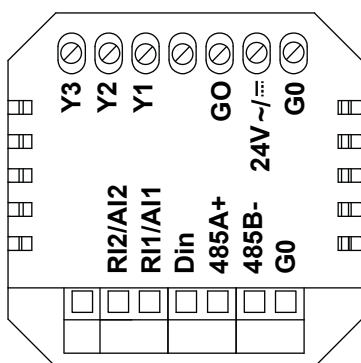


Y3	Analogue output 3, 0...10 Vdc, configurable (the default function is extract flow)	 Important: The maximum wire length is 30 m.
Y2	Analogue output 2, 0...10 Vdc, configurable (the default function is supply flow)	
Y1	Analogue output 1, 0...10 Vdc, configurable (the default function is heating stage 1)	
G0	0 V, common	 Important: The maximum wire length is 3 m.
24V	Supply, 24 Vac/dc	
G0	0 V, common	
RI2/AI2	External temperature sensor input 2, NTC 10 (0...10 Vdc with AI option)	
RI1/AI1	External temperature sensor input 1, NTC 10 (0...10 Vdc with AI option)	
Din	Digital input, potential free contact	
485A+	Modbus RTU / BACnet MS/TP, RS-485	 Note: The bus is not galvanically isolated.
485B-		
G0	0 V, common	

Ordering information

		Type	0	1	2	3	4	5	6
0	Touchscreen room controller		6001	B		2			
1	Device type	Apartment controller	TRC-A-3A	B					
2	Communication	Modbus	-MOD		M				
		Bacnet	-BAC		B				
3	Power supply	24 Vac/dc	-24			2			
4	Additional measurements	No additional measurements					0		
		Relative humidity	-RH				1		
		CO ₂	-CO ₂				2		
		Relative humidity and CO ₂	-RH-CO ₂				3		
5	Advanced options	No advanced options						0	
		2 x 0...10 Vdc input (replaces RI1 & RI2)	-AI					1	
		Consumption data view	-CD					5	
		Consumption data view and 2 x 0...10 Vdc input (replaces RI1 & RI2)	-AI-CD					6	
6	Body colour	White (RAL 9010)	-W						W
		Black (RAL 8022)	-B						B

Dimensions

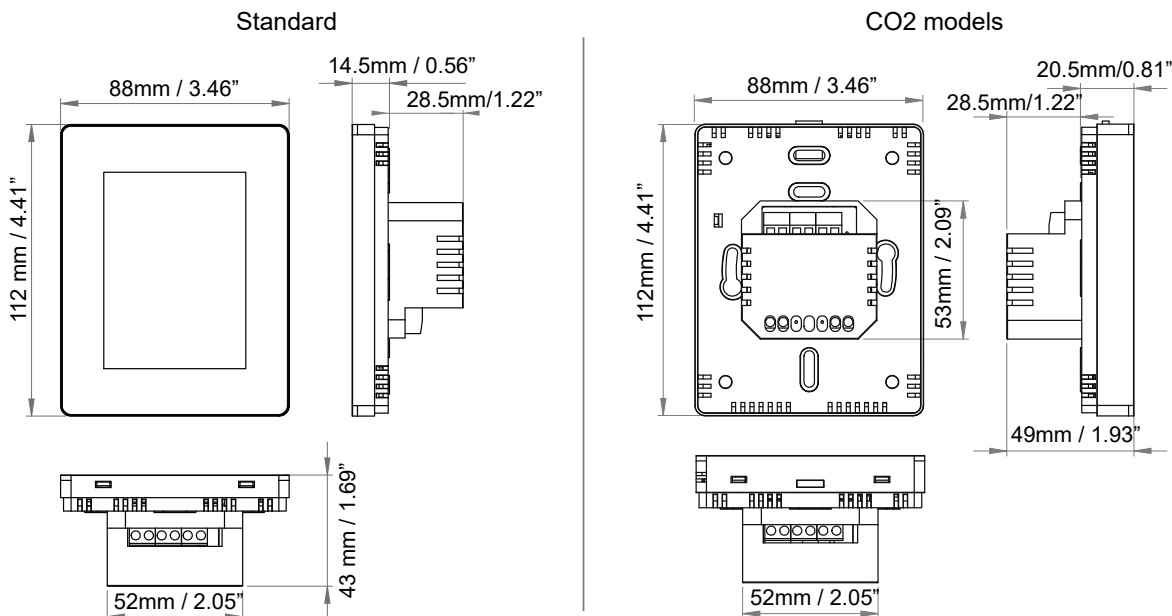

Supported standards and directives

Standard	Description
2014/30/EU	Electromagnetic Compatibility (EMC).
2014/35/EU	Low Voltage Directive (LVD).
2011/65/EU	Restriction of Hazardous Substances (RoHS2) Directive.
EN 61000-6-1:2019	Electromagnetic compatibility (EMC) - Part 6-1: Generic standards - Immunity standard for residential, commercial and light-industrial environments.
EN 61000-6-3:2021	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments.
EN 60730-1:2016	Automatic electrical controls - Part 1: General requirements.